


CUS,CUL,ALS,ALL SERIES


CONDUCTIVE COPPER • ALUMINIUM FOIL TAPE



EMC
Shielding
Effects

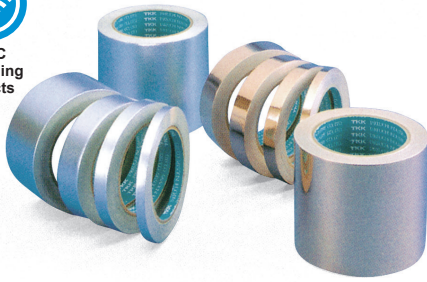

■ **Construction**



■ **Characteristic**

Contents	Copper	Aluminium
Foil thickness (µm)	35	50
Adhesive layer thickness (µm)	60	60
Overall thickness (µm)	95	110
Adhesive force (gf/25mm) 180° peel test on SUS	1300	1300
Contact resistance value (Ω/25mm/2kgf)	0.003	0.005

- Flexible copper and aluminium tape.
- Conductive adhesive layer maintains conductivity.
- Copper tape can be soldered onto a metal foil.
- Copper and aluminium tape are UL510 (FR) certified products.

Usage

- Grounding and shielding for enclosures.
- Grounding and shielding for cable harnesses or connectors.
- EMI shielded room.
- Can be used for measuring shield characteristics in an emergency situation.

COPPER FOIL TAPE

Product no. / Dimensions

Product no.	Width	Length
CUS- 8T	8.0	2m
CUS-13T	13.0	2m
CUS-25T	25.0	2m
CUL- 8T	8.0	20m
CUL-13T	13.0	20m
CUL-25T	25.0	20m
CUL-50T	50.0	20m

ALUMINIUM FOIL TAPE

Product no. / Dimensions

Product no.	Width	Length
ALS- 8T	8.0	2m
ALS-13T	13.0	2m
ALS-25T	25.0	2m
ALL- 8T	8.0	20m
ALL-13T	13.0	20m
ALL-25T	25.0	20m
ALL-50T	50.0	20m