CVP-M series METAL VENTILATION PLUG



Pressure Equalization / Ventilation






- High durability yet highly affordable economical metal ventilation plug.
- IP68 protection class rated (water depth 2 meters / 60 mins)
- Ventilation plug protects the enclosure from deformation by equalizing internal and external pressure differences, as well as venting the gas generated within the enclosure.
- Recommended to be installed at the sides of the enclosure.

CVP-M dimensions

■ DXF/DWG/PDF drawings available on our website.

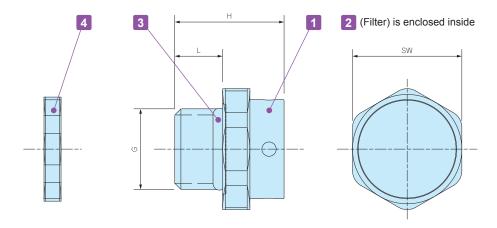

Components

■ PA = Polyamide

No.	Part name	Material
1	Housing	Brass / Nickel plated
2	Filter	PTFE
3	O-ring	Silicone
4	Lock nut	Brass / Nickel plated

Technical Data

Product no.	CVP-6M	CVP-12M	CVP-20M
Airflow	800ml / min (dp = 7kPa)	2000ml / min (dp = 7kPa)	5000ml / min (dp = 7kPa)
Certification	IP68 (1hours / 2m-depth)		
Operating temperature	-40°C ~ +120°C		

■ Airflow value listed is for reference only; check under actual usage conditions.

Product no. / Details

Product no.	G		sw			Weight (g)
Silver	Thread size	Mount hole	SW	"	<u> </u>	Weight (g)
CVP- 6M	M 6 × P1	Ф 6.2	10	15	7	6.2
CVP-12M	M12 × P1.5	Ф12.2	16	16	7	14
CVP-20M	M20 × P1.5	Ф20.2	21.8	18.9	10	40.2