



- Super strong double-sided mounting tape with excellent cold and heat resistance.
- Allow cases to be attached onto any place.
- Easily attached onto walls where holes cannot be drilled.
- Can be used with a range of products, such as small IoT type enclosures.

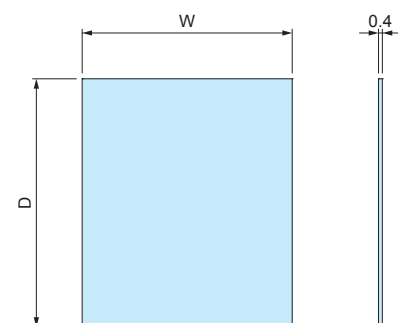
- Please ensure that surface is cleaned and grease-free before adhering.
- Once removed, it cannot be adhered on again.

Notes:

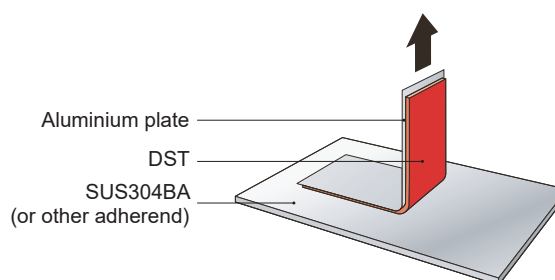
Due to the strong adhesive strength, do ensure that the surface or product is suitable to be adhered onto.

Technical Data

Operating temperature:
-30°C ~ +200°C

**Adhesion Performance (90° peel adhesion)**

90° direction Peel force N/cm	Stainless steel (SUS304BA)	24
	Aluminium (A1050P)	21
	Bonded steel plate (SECC)	30
	ABS	10
	Acrylic (PMMA)	16
	Polypropylene	6
	Polyethylene (HDPE)	3
	Glass	27

**【Test Method】**

Backed with specially treated aluminium foil (130μm), crimped with a 10kg steel roller back and forth for 2 times, cured at room temperature for 72 hours, tensile speed 300mm/min.

*Data values listed are test results based on the test conditions, and are to be used as reference only.

*Adhesive strength and other physical properties vary depending on the adherend, bonding and curing conditions, among others.

Product no. / Details

■ Material / Color: Acrylic foam base, acrylic adhesive / gray

Product no.	W	D	Suitable models	Weight (g)	Pack of
NEW DST14-22	14	22	SIC2-4-1 SW-30	0.3 / pc	5
NEW DST14-36	14	36	SIC2-5-1	0.4 / pc	5
DST18-40	18	40	SIC3-5-2 SW-(T)40 • 60	0.7 / pc	5
DST22-26	22	26	SIC3-4-2 SW-(T)40	0.7 / pc	5
DST24-48	24	48	SIC3-6-2 SW-50 • 53 • (N)(T)55 • (N)65 TW/TWN4-2-5 • 4-2-6 • 4-2-8	0.7 / pc	5