
TAKACHI

BOLT-ON D-RING



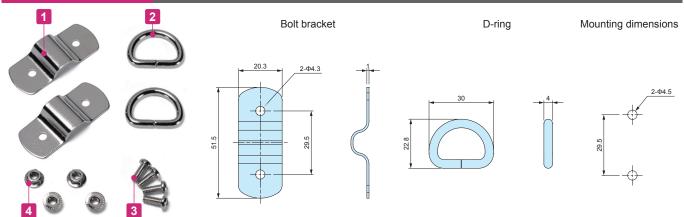

Components

No.	Part name	Pcs	Material	Finish
1	Bolt bracket	2	Steel	Nickel plated
2	D-ring	2	Steel	Nickel plated
3	Screw (Pan head M4 -10)	4	Steel	Nickel plated
4	Serrated flange nut M4	4	Steel	Nickel plated

^{*}Screws may penetrate and protrude out from the underside of the installed part.

Product no. / Details

Product no.	Weight (g)
GF-30	41.1

Technical Data	
Max load: 10kg	

^{*}Static load value. For reference use only.

SHOULDER STRAP NSTP810

■ Nylon shoulder strap with polyurethane pads to reduce fatigue when slung over the shoulder.




Components

No.	Part name	Material	
1	Belt	Nylon	
2	Pad	Neoplane • Polyurethane	
3	Hook	Steel (Black painted)	

Product no. / Details

Product no.	Weight (g)	Pack of
NSTP810	238	1

GF-30 Mounting example





Application example

Recommended to be used with GF-30 Bolt-on D-ring for



^{*}Serrated flange nut may cause scratches on the surface.