

LCT·LCS·LC·LCE HAND-HELD PLASTIC CASE


Hand-held case suitable for industrial measuring equipments, wireless communication devices and medical equipments.

8 different sizes and 9 different battery compartment types are available for LC plastic case.

LCS series comes with 7 silicone cover colors for selection.

LCT series is selectable in 5 different rugged shock-proof silicone cover colors.


LCT Plastic case with shock-proof silicone cover

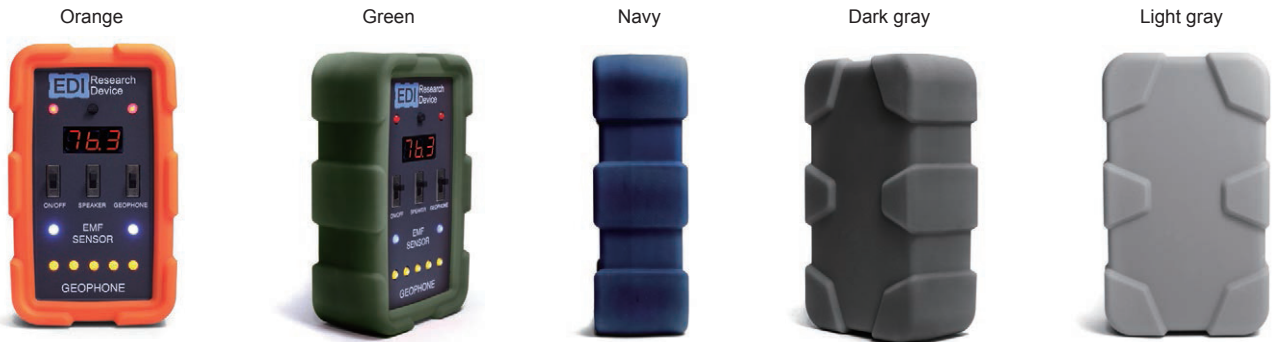

LCS Plastic case with silicone cover



CUSTOMIZATION

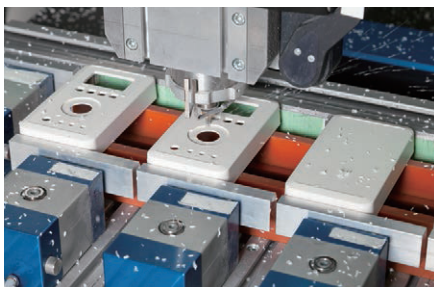

Machining



Custom cut on silicone cover



Custom color, custom shaped silicone cover



Digital printed overlay



APPLICATION EXAMPLE

METAL COATING THICKNESS GAUGE

Product by NOVOTEST (Ukraine)



SOLAR PANEL TROUBLE CHECKER

Product by ITES (Japan)



SOLAR CELL DISCONNECTION CHECKER

Product by Shinei Electronic Measuring (Japan)



DIGITAL PRESSURE GAUGE SETTER

Product by NAGANO KEIKI (Japan)



EMF DETECTOR

Product by CenTex Paranormal (USA)



DISTRIBUTION TRANSFORMER TESTER

Product by ndb Technologies (Canada)



NETWORK PARTIAL DISCHARGE CHECKER

Product by ndb Technologies (Canada)



RADIATION SURVEY METER

Product by HISAKI Sekkei (Japan)



MINI RADIATION SURVEY METER

Product by Techno AP (Japan)



WIRELESS VOLTAGE PROBE

Product by Enertronics (Switzerland)



PORTABLE ANEMOMETER

Product by FieldPro (Japan)




ULTRASONIC THICKNESS GAUGE

Product by DEMAQ (Argentina)



HYPERHIDROSIS TREATMENT DEVICE

Product by Merebit (Czech Republic)

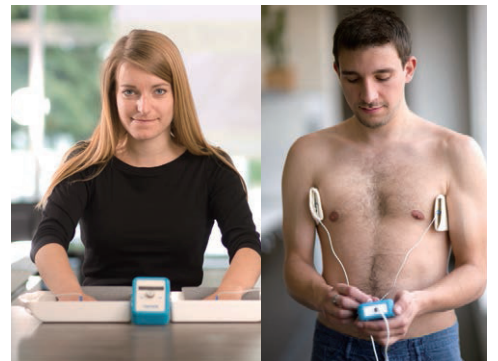


RF SCOPE

Product by Arrow7 Corporation (Japan)



SATELLITE BROADCASTING SIGNAL GENERATOR

Product by MASPRO (Japan)

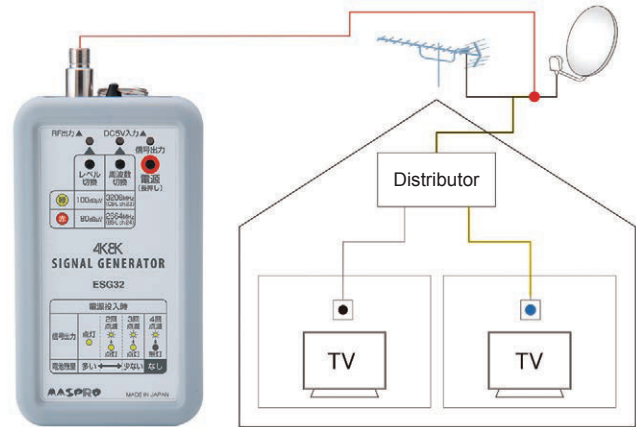

ONBOARD PROGRAMMER

Product by Hokuto Electronic (Japan)



CODE DEBUGGER

Product by BITRAN (Japan)



LCT SERIES

HAND-HELD CASE with SHOCK-PROOF SILICONE COVER



Technical Data

Protection class: IP40
 Operating temperature: -10°C ~ +60°C

- Plastic case with shock-proof silicone cover. Protects the device from various impact.
- Manufactured with flame-resistant ABS UL94V-0 material. Selectable from a range of battery compartment types.
- Positive (+) / Negative (-) pole marks are incised on the inside of the battery compartments.
- Suitable for measuring instruments, test devices, wireless communication devices, medical devices and so on.

Battery compartment type

No battery compartment type



Components

No.	Part name	Pcs	Material	Color / Finish
1	Top cover	1	ABS UL94V-0	Off-white • Dark gray
2	Bottom cover	1	ABS UL94V-0	Off-white • Dark gray
3	Panel	1	ABS UL94V-0	Off-white • Dark gray
4	Self tapping screws	4	Steel M2.6	Nickel plated • Black trivalent chromate
5	Battery cover	1	ABS UL94V-0	Off-white • Dark gray
6	Battery contact • Battery snap	1 set	Brass • Brass : PVC	Nickel plated • Nickel plated : Black
7	Silicone cover	1	Silicone	Orange • Green • Navy • Dark gray • Light gray

Accessories (Optional parts)



Tapping standoff TPS series
 See page TPS • MT-1



PCB mounting screw EM-2.3
 See page EM • MR-1



TORX screw MR series
 See page EM • MR-1












Key ring CR-20
 See page STP • CR-1




Strap STP series
 See page STP • CR-1

Battery Compartment Type

Type	N None	F2 AAA x 2	F3 AAA x 3	F4 AAA x 4	F6 AAA x 6	M2 AA x 2	M3 AA x 3	M4 AA x 4	9V 9V x 1
Battery compartment									

Color Type

Code	D/O Dark gray / Orange	D/G Dark gray / Green	D/N Dark gray / Navy	D/D Dark gray / Dark gray	D/L Dark gray / Light gray
Color					
Code	W/O Off-white / Orange	W/G Off-white / Green	W/N Off-white / Navy	W/D Off-white / Dark gray	W/L Off-white / Light gray
Color					


Product no. / Dimensions

■ Please suffix color code at the end of the product number.

Product no.	W	H	D	Battery compartment	Weight (g)
LCT115 -N -□□	76(69)	28(19.5)	121.9(115)	None	123.5
LCT115 -F2 -□□	76(69)	28(19.5)	121.9(115)	AAA x 2	128
LCT115 -F3 -□□	76(69)	28(19.5)	121.9(115)	AAA x 3	130
LCT115H-N -□□	76(69)	36.5(28)	121.9(115)	None	141
LCT115H-F2 -□□	76(69)	36.5(28)	121.9(115)	AAA x 2	145.5
LCT115H-F3 -□□	76(69)	36.5(28)	121.9(115)	AAA x 3	147
LCT115H-M2-□□	76(69)	36.5(28)	121.9(115)	AA x 2	149.5
LCT115H-9V-□□	76(69)	36.5(28)	121.9(115)	9V x 1	149
LCT135 -N -□□	85(76)	40(27)	143.9(135)	None	210.5
LCT135 -F4 -□□	85(76)	40(27)	143.9(135)	AAA x 4	225.5
LCT135 -M2-□□	85(76)	40(27)	143.9(135)	AA x 2	223.5
LCT135 -M3-□□	85(76)	40(27)	143.9(135)	AA x 3	229
LCT135 -9V-□□	85(76)	40(27)	143.9(135)	9V x 1	227
LCT135H-N -□□	85(76)	48(35)	143.9(135)	None	231.5
LCT135H-F4 -□□	85(76)	48(35)	143.9(135)	AAA x 4	246
LCT135H-M2-□□	85(76)	48(35)	143.9(135)	AA x 2	245
LCT135H-M3-□□	85(76)	48(35)	143.9(135)	AA x 3	250
LCT135H-9V-□□	85(76)	48(35)	143.9(135)	9V x 1	247.5
LCT145S-N -□□	105(96)	33(20)	153.9(145)	None	239.1
LCT145S-F6 -□□	105(96)	33(20)	153.9(145)	AAA x 6	259.1
LCT145 -N -□□	105(96)	40(27)	153.9(145)	None	258.5
LCT145 -F6 -□□	105(96)	40(27)	153.9(145)	AAA x 6	278.5
LCT145 -M2-□□	105(96)	40(27)	153.9(145)	AA x 2	272.5
LCT145 -M4-□□	105(96)	40(27)	153.9(145)	AA x 4	279.5
LCT145H-N -□□	105(96)	48(35)	153.9(145)	None	282
LCT145H-F6 -□□	105(96)	48(35)	153.9(145)	AAA x 6	302.5
LCT145H-M2-□□	105(96)	48(35)	153.9(145)	AA x 2	296
LCT145H-M4-□□	105(96)	48(35)	153.9(145)	AA x 4	303
LCT165 -N -□□	89(80)	40(27)	173.9(165)	None	263.5
LCT165 -M4-□□	89(80)	40(27)	173.9(165)	AA x 4	283
LCT165H-N -□□	89(80)	48(35)	173.9(165)	None	286
LCT165H-M4-□□	89(80)	48(35)	173.9(165)	AA x 4	305

■ () value = enclosure dimension.

Silicone cover dimensions

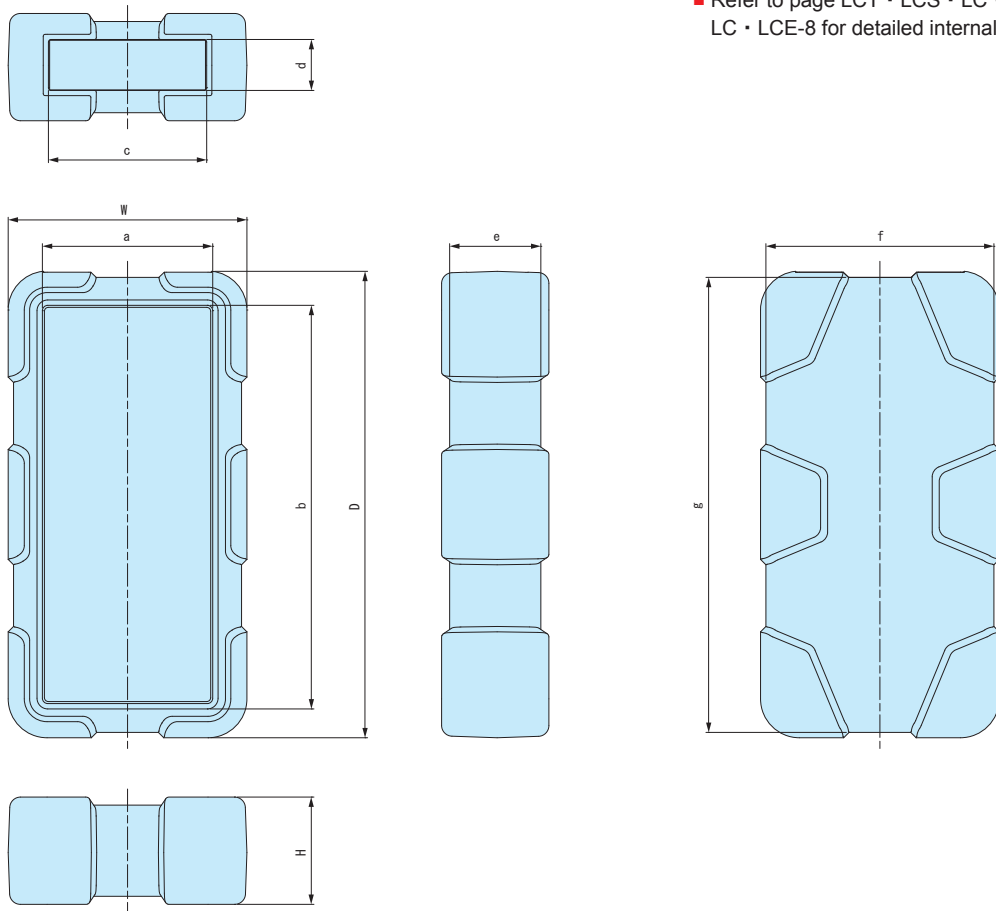


- Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.
- Refer to page LCT · LCS · LC · LCE-5 ~ LCT · LCS · LC · LCE-8 for detailed internal enclosure dimensions.

Product no.	W	H	D	a	b	c	d	e	f	g
LCT115 -N -□□	76	28	121.9	55.5	101.5	48.3	12	24	72	117.8
LCT115 -F2 -□□	76	28	121.9	55.5	101.5	48.3	12	24	72	117.8
LCT115 -F3 -□□	76	28	121.9	55.5	101.5	48.3	12	24	72	117.8
LCT115H -N -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -F2 -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -F3 -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -M2 -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT115H -9V -□□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8
LCT135 -N -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -F4 -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -M2 -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -M3 -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135 -9V -□□	85	40	143.9	59.5	118.5	55	19	34	81	139.7
LCT135H -N -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -F4 -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -M2 -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -M3 -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT135H -9V -□□	85	48	143.9	59.5	118.5	55	27	42	81	139.6
LCT145S -N -□□	105	33	153.9	76.5	125.5	71	12	27	101	149.9
LCT145S -F6 -□□	105	33	153.9	76.5	125.5	71	12	27	101	149.9
LCT145 -N -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145 -F6 -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145 -M2 -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145 -M4 -□□	105	40	153.9	76.5	125.5	71	19	34	101	149.7
LCT145H -N -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT145H -F6 -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT145H -M2 -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT145H -M4 -□□	105	48	153.9	76.5	125.5	71	27	42	101	149.7
LCT165 -N -□□	89	40	173.9	63.5	148.5	59	19	34	85	169.7
LCT165 -M4 -□□	89	40	173.9	63.5	148.5	59	19	34	85	169.7
LCT165H -N -□□	89	48	173.9	63.5	148.5	59	27	42	85	169.6
LCT165H -M4 -□□	89	48	173.9	63.5	148.5	59	27	42	85	169.6

Enclosure dimensions

- Drawings below are reference examples only. DXF/DWG/PDF drawings available on our website.
- Refer to page LCT · LCS · LC · LCE-5 ~ LCT · LCS · LC · LCE-8 for detailed internal enclosure dimensions.

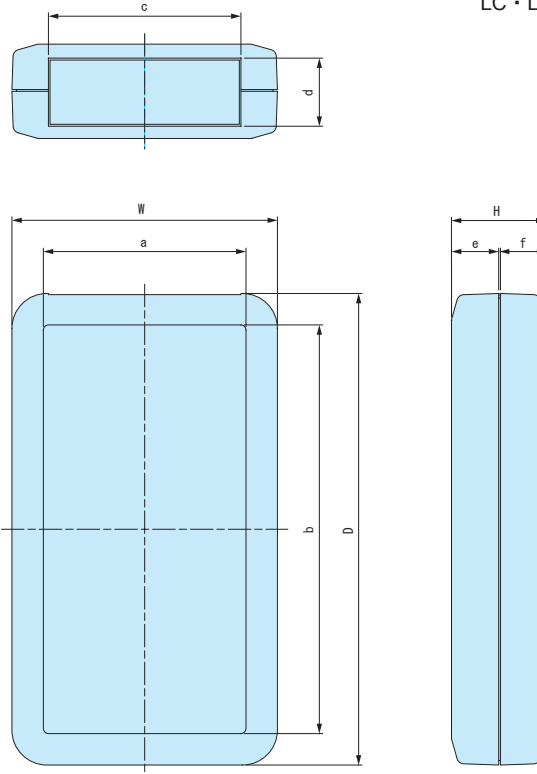


■ Please suffix color code at the end of the product number.

Product no.	W	H	D	a	b	c	d	e	f	Battery compartment
LCT115 -N -□□	69	19.5	115	54	100	48.1	12	10	9	None
LCT115 -F2 -□□	69	19.5	115	54	100	48.1	12	10	9	AAA x 2
LCT115 -F3 -□□	69	19.5	115	54	100	48.1	12	10	9	AAA x 3
LCT115H -N -□□	69	28	115	54	100	48.1	20.5	18.5	9	None
LCT115H -F2 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AAA x 2
LCT115H -F3 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AAA x 3
LCT115H -M2 -□□	69	28	115	54	100	48.1	20.5	18.5	9	AA x 2
LCT115H -9V -□□	69	28	115	54	100	48.1	20.5	18.5	9	9V x 1
LCT135 -N -□□	76	27	135	58	117	55.1	19.5	13.5	13	None
LCT135 -F4 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AAA x 4
LCT135 -M2 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AA x 2
LCT135 -M3 -□□	76	27	135	58	117	55.1	19.5	13.5	13	AA x 3
LCT135 -9V -□□	76	27	135	58	117	55.1	19.5	13.5	13	9V x 1
LCT135H -N -□□	76	35	135	58	117	55.1	27.5	21.5	13	None
LCT135H -F4 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AAA x 4
LCT135H -M2 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AA x 2
LCT135H -M3 -□□	76	35	135	58	117	55.1	27.5	21.5	13	AA x 3
LCT135H -9V -□□	76	35	135	58	117	55.1	27.5	21.5	13	9V x 1
LCT145S -N -□□	96	20	145	75	124	71.1	12.5	7.5	12	None
LCT145S -F6 -□□	96	20	145	75	124	71.1	12.5	7.5	12	AAA x 6
LCT145 -N -□□	96	27	145	75	124	71.1	19.5	14.5	12	None
LCT145 -F6 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AAA x 6
LCT145 -M2 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AA x 2
LCT145 -M4 -□□	96	27	145	75	124	71.1	19.5	14.5	12	AA x 4
LCT145H -N -□□	96	35	145	75	124	71.1	27.5	22.5	12	None
LCT145H -F6 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AAA x 6
LCT145H -M2 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AA x 2
LCT145H -M4 -□□	96	35	145	75	124	71.1	27.5	22.5	12	AA x 4
LCT165 -N -□□	80	27	165	62	147	59.1	19.5	13.5	13	None
LCT165 -M4 -□□	80	27	165	62	147	59.1	19.5	13.5	13	AA x 4
LCT165H -N -□□	80	35	165	62	147	59.1	27.5	21.5	13	None
LCT165H -M4 -□□	80	35	165	62	147	59.1	27.5	21.5	13	AA x 4

LCT • LCS (Case only) / LC • LCE Dimensions


■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.

LC / LCE / LCS / LCT115-N
LC / LCE / LCS / LCT115H-N

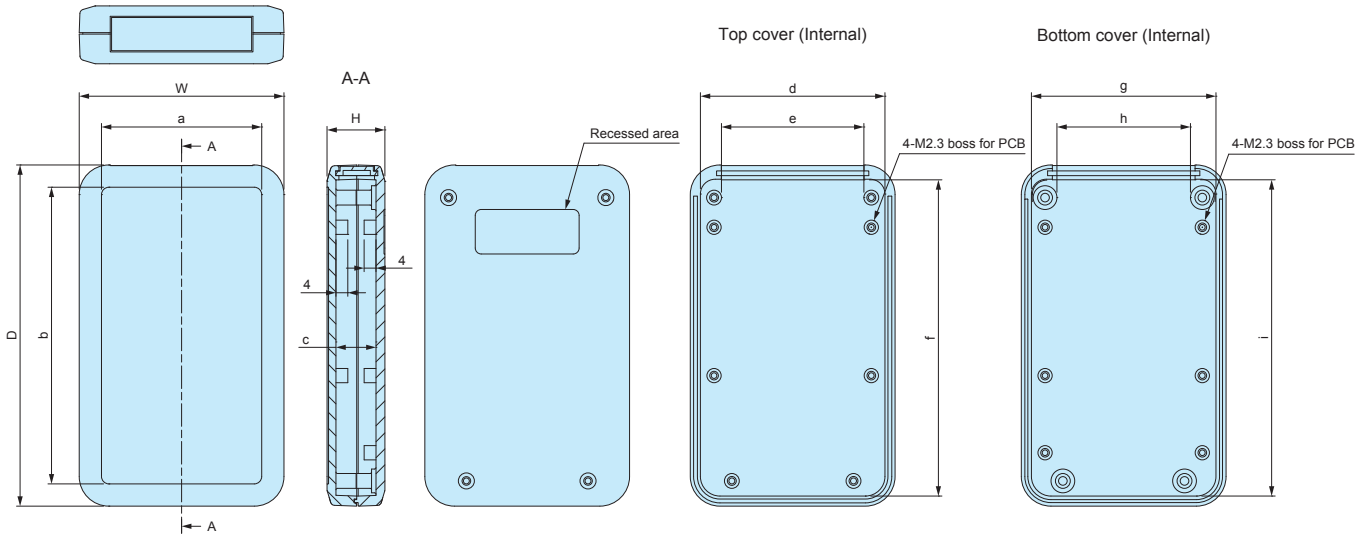

Product no.	W	H	D	a	b	c	d	e	f	g	h	i
LC • LCE • LCS • LCT115 -N	69	19.5	115	54	100	13.5	61.5	47	106.1	61.6	44	106.1
LC • LCE • LCS • LCT115H-N	69	28	115	54	100	22	60.9	47	105.5	61.5	44	106.1


LC / LCS / LCT115-F2 • LC / LCS / LCT115H-F2
LC / LCS / LCT115-F3 • LC / LCS / LCT115H-F3
LC / LCS / LCT115H-M2 • LC / LCS / LCT115H-9V

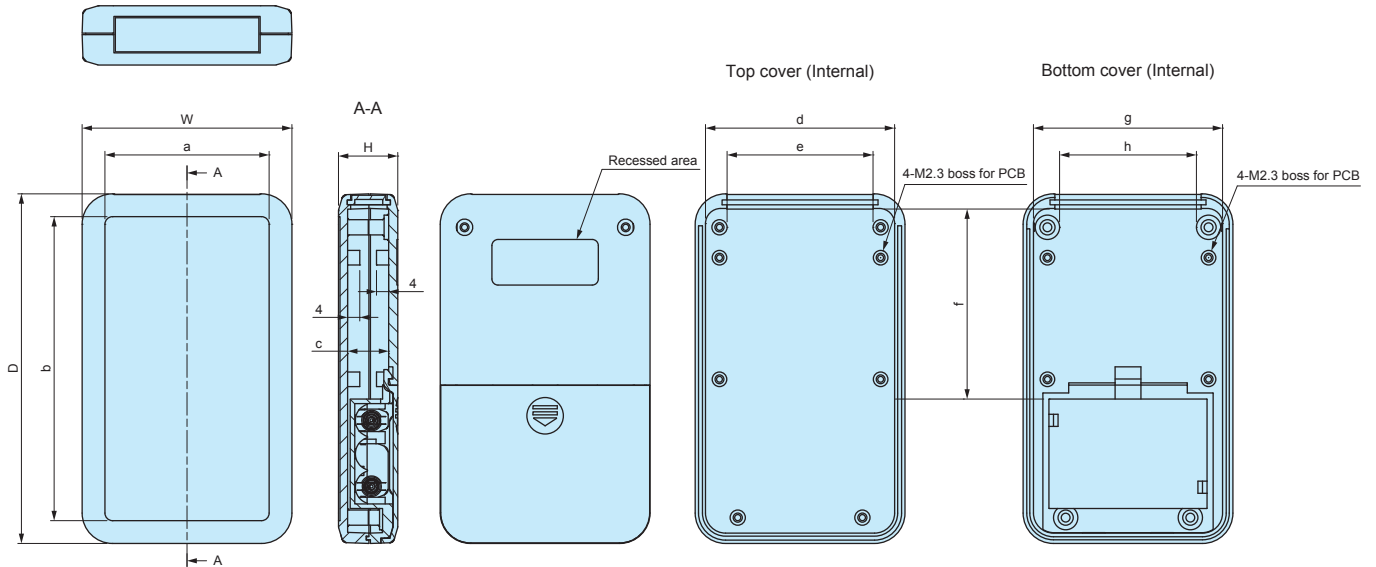

Product no.	W	H	D	a	b	c	d	e	f	g	h
LC • LCS • LCT115 -F2	69	19.5	115	54	100	13.5	61.5	47	73.3	61.6	44
LC • LCS • LCT115 -F3	69	19.5	115	54	100	13.5	61.5	47	62.3	61.6	44
LC • LCS • LCT115H-F2	69	28	115	54	100	22	60.9	47	73.3	61.6	44
LC • LCS • LCT115H-F3	69	28	115	54	100	22	60.9	47	62.3	61.6	44
LC • LCS • LCT115H-M2	69	28	115	54	100	22	60.9	47	65.1	61.6	44
LC • LCS • LCT115H-9V	69	28	115	54	100	22	60.9	47	66	61.6	44

LC / LCE / LCS / LCT135-N
LC / LCS / LCT135H-N


※ Number of PCB bosses vary by model.
Refer to DXF/DWG/PDF drawings for more details.

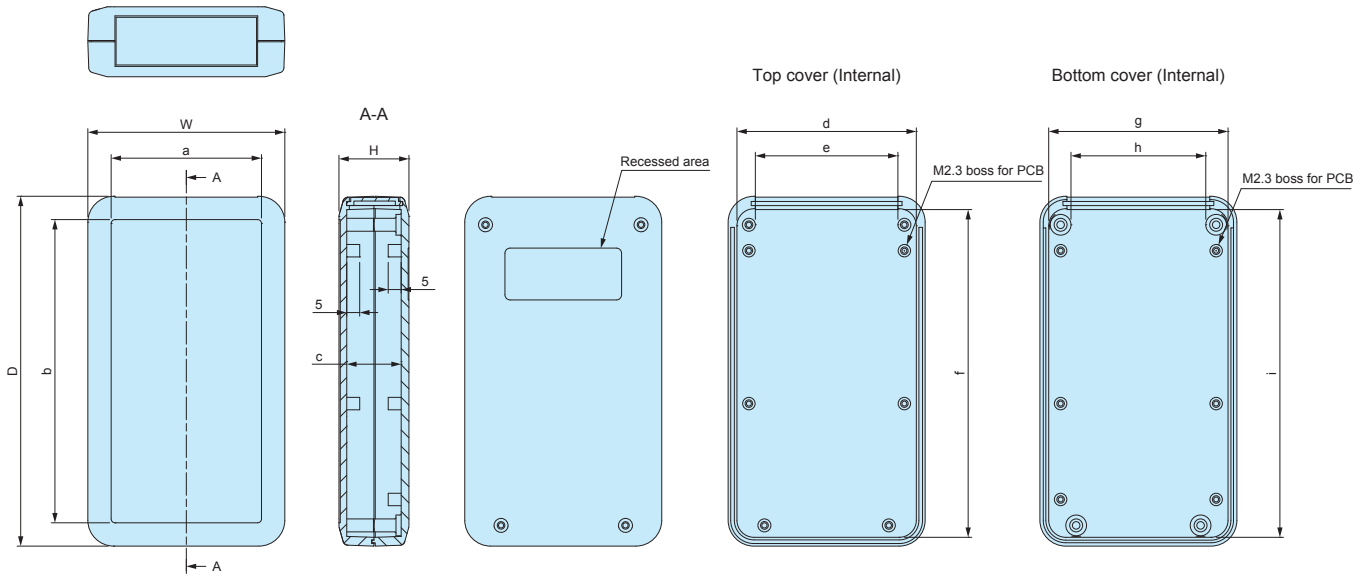

Product no.	W	H	D	a	b	c	d	e	f	g	h	i
LC • LCE • LCS • LCT135-N	76	27	135	58	117	21	68.2	55	125.8	68.3	51	125.9
LC • LCS • LCT135H-N	76	35	135	58	117	29	67.7	54	125.3	68.3	51	125.9

LC / LCS / LCT135-F4 • LC / LCS / LCT135H-F4 • LC / LCS / LCT135-M2 • LC / LCS / LCT135H-M2
LC / LCS / LCT135-M3 • LC / LCS / LCT135H-M3 • LC / LCS / LCT135-9V • LC / LCS / LCT135H-9V

※ Number of PCB bosses vary by model.
Refer to DXF/DWG/PDF drawings for more details.

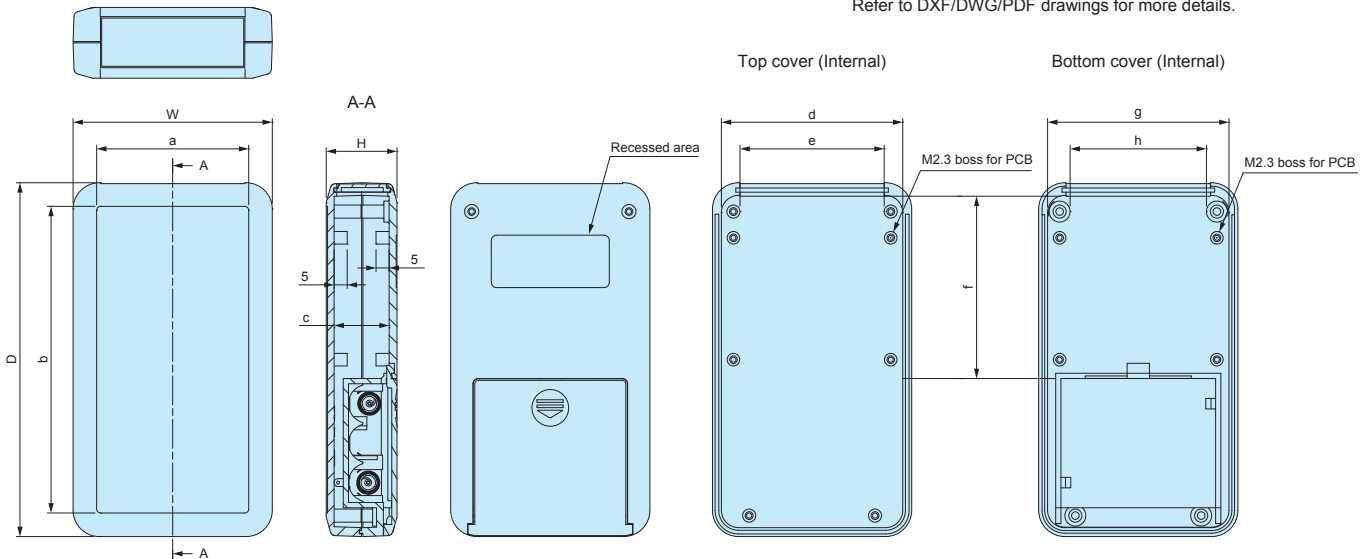


Product no.	W	H	D	a	b	c	d	e	f	g	h
LC • LCS • LCT135 -F4	76	27	135	58	117	21	68.2	55	69.4	68.3	51
LC • LCS • LCT135 -M2	76	27	135	58	117	21	68.2	55	84.5	68.3	51
LC • LCS • LCT135 -M3	76	27	135	58	117	21	68.2	55	69.4	68.3	51
LC • LCS • LCT135 -9V	76	27	135	58	117	21	68.2	55	84.5	68.3	51
LC • LCS • LCT135H-F4	76	35	135	58	117	29	67.7	54	69.4	68.3	51
LC • LCS • LCT135H-M2	76	35	135	58	117	29	67.7	54	84.5	68.3	51
LC • LCS • LCT135H-M3	76	35	135	58	117	29	67.7	54	69.4	68.3	51
LC • LCS • LCT135H-9V	76	35	135	58	117	29	67.7	54	84.5	68.3	51

LCT • LCS (Case only) / LC • LCE Dimensions

■ Drawings below are reference examples only.
DXF/DWG/PDF drawings available on our website.


LC / LCS / LCT145S-N
LC / LCS / LCT145-N
LC / LCE / LCS / LCT145H-N

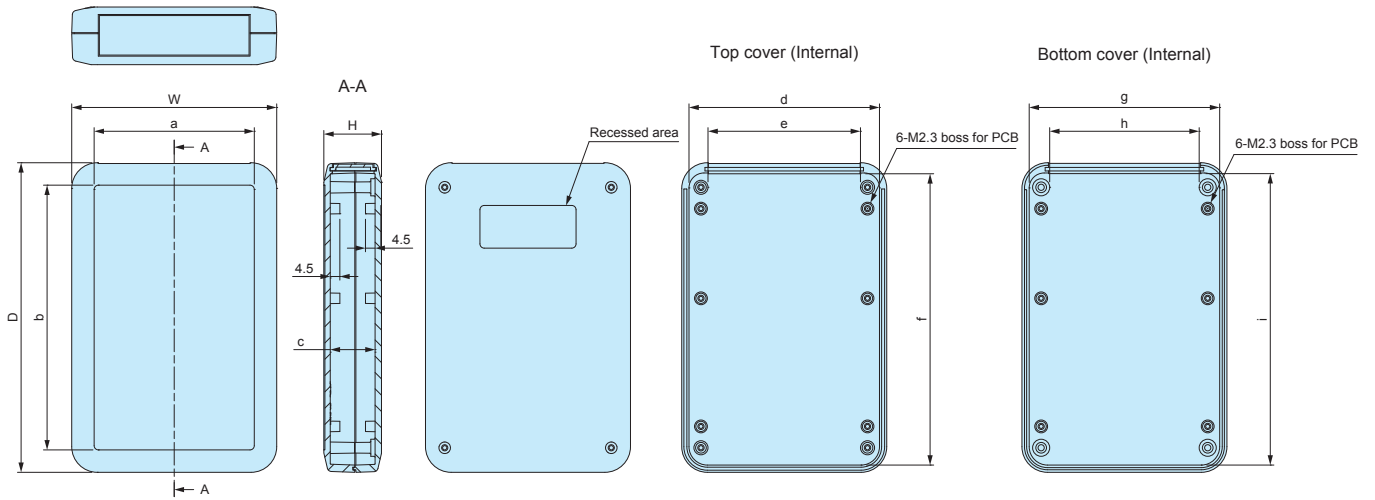

Product no.	W	H	D	a	b	c	d	e	f	g	h	i
LC • LCS • LCT145S-N	96	20	145	75	124	14	88.3	71.4	135.9	87.9	68.9	135.5
LC • LCS • LCT145 -N	96	27	145	75	124	21	87.8	71.4	135.4	87.9	68.9	135.5
LC • LCE • LCS • LCT145H-N	96	35	145	75	124	29	87.2	71	134.8	87.9	68.9	135.5


LC / LCS / LCT145S-F6 • LC / LCS / LCT145-F6 • LC / LCS / LCT145H-F6
LC / LCS / LCT145-M2 • LC / LCS / LCT145H-M2
LC / LCS / LCT145-M4 • LC / LCS / LCT145H-M4

※ Number of PCB bosses vary by model.
Refer to DXF/DWG/PDF drawings for more details.

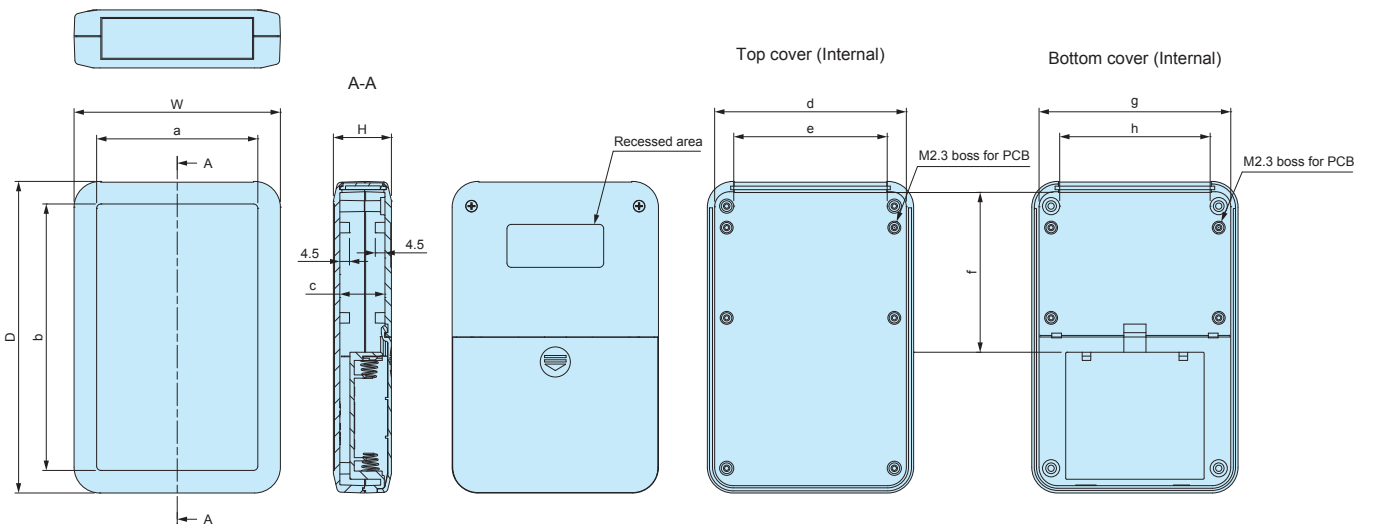

Product no.	W	H	D	a	b	c	d	e	f	g	h
LC • LCS • LCT145S -F6	96	20	145	75	124	14	88.3	71.4	78.4	87.9	68.9
LC • LCS • LCT145 -F6	96	27	145	75	124	21	87.8	71.4	78.4	87.9	68.9
LC • LCS • LCT145 -M2	96	27	145	75	124	21	87.8	71.4	97.4	87.9	68.9
LC • LCS • LCT145 -M4	96	27	145	75	124	21	87.8	71.4	74	87.9	68.9
LC • LCS • LCT145H -F6	96	35	145	75	124	29	87.2	71	78.4	87.9	68.9
LC • LCS • LCT145H-M2	96	35	145	75	124	29	87.2	71	97.4	87.9	68.9
LC • LCS • LCT145H-M4	96	35	145	75	124	29	87.2	71	74	87.9	68.9


LC / LCS / LCT165-N
 LC / LCE / LCS / LCT165H-N

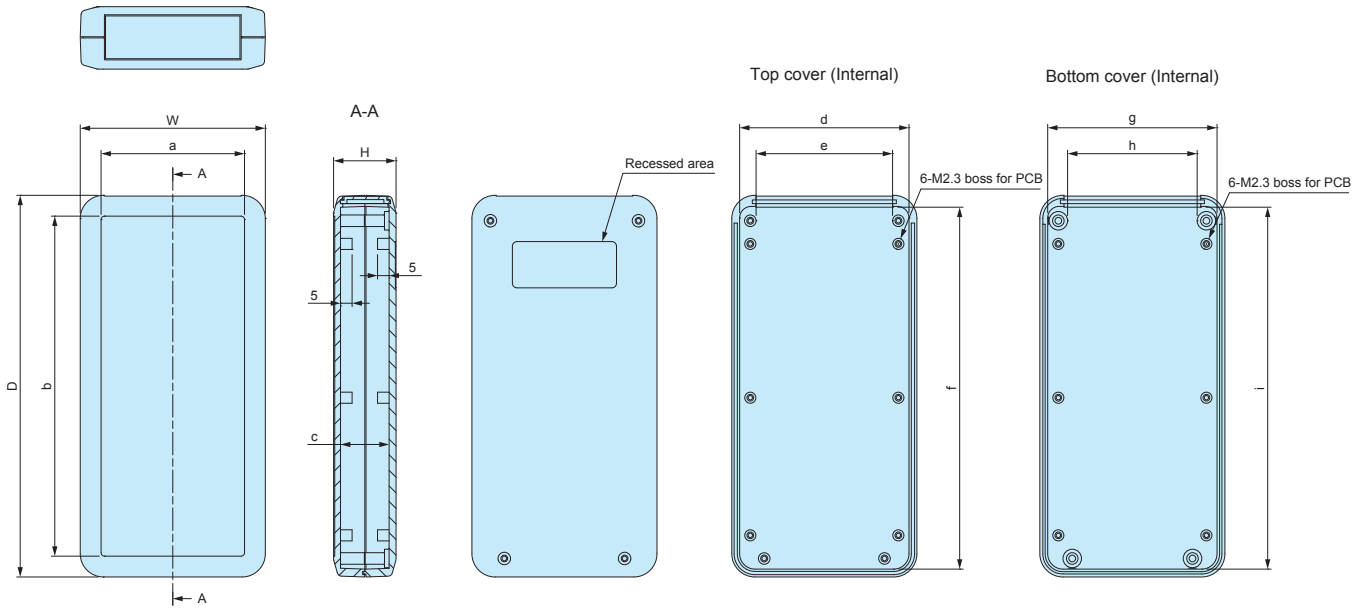

Product no.	W	H	D	a	b	c	d	e	f	g	h	i
LC • LCS • LCT165-N	80	27	165	62	147	21	72.2	58	155.8	72.3	55	155.9
LC • LCE • LCS • LCT165H-N	80	35	165	62	147	29	71.7	58	155.3	72.3	55	155.9

LC / LCS / LCT165-M4
 LC / LCS / LCT165H-M4

※ Number of PCB bosses vary by model.
 Refer to DXF/DWG/PDF drawings for more details.

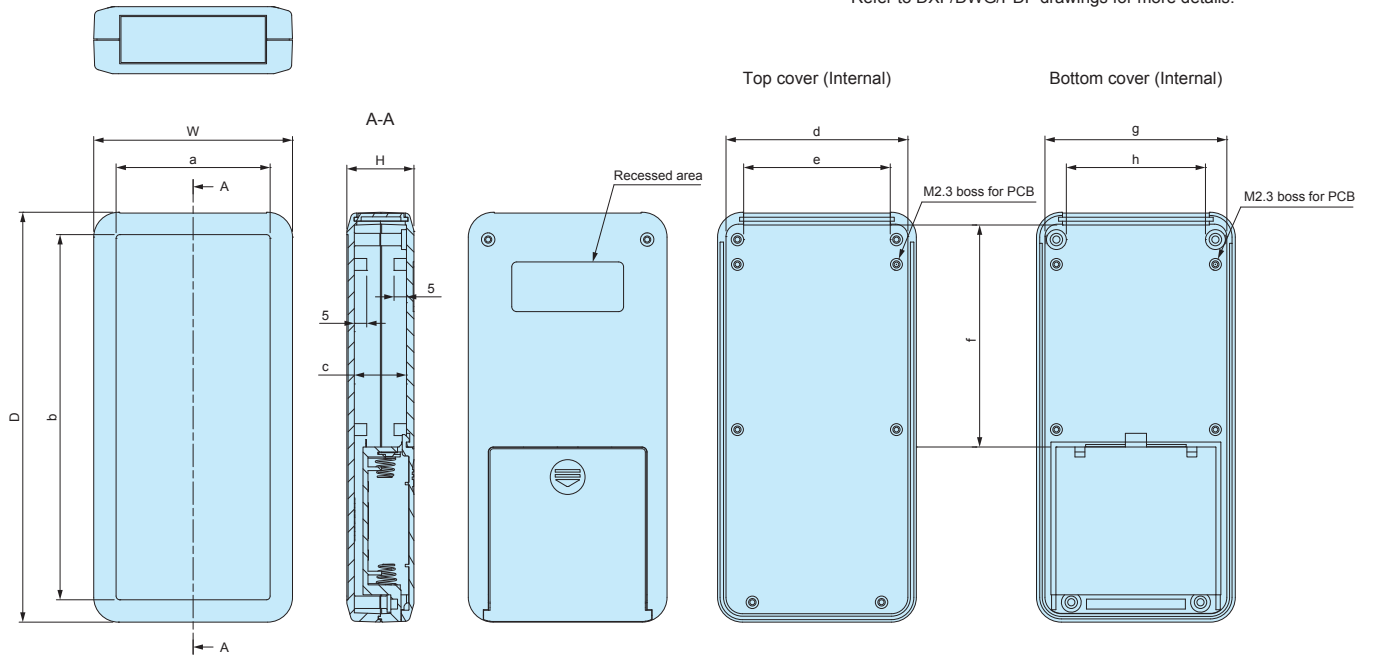

Product no.	W	H	D	a	b	c	d	e	f	g	h
LC • LCS • LCT165 -M4	80	27	165	62	147	21	72.2	58	89.2	72.3	55
LC • LCS • LCT165H-M4	80	35	165	62	147	29	71.7	58	89.2	72.3	55


LCTP SERIES

SHOCK-PROOF SILICONE COVER

Color Type



- Shock-proof silicone cover for LC series. New sizes now available!
- Custom color is available from 500pcs per order batch. For custom color order, please specify **PANTONE®**, RGB color number or provide your sample color.
- Drawings below are reference examples only. DXF/DWG/PDF drawings available on our website.

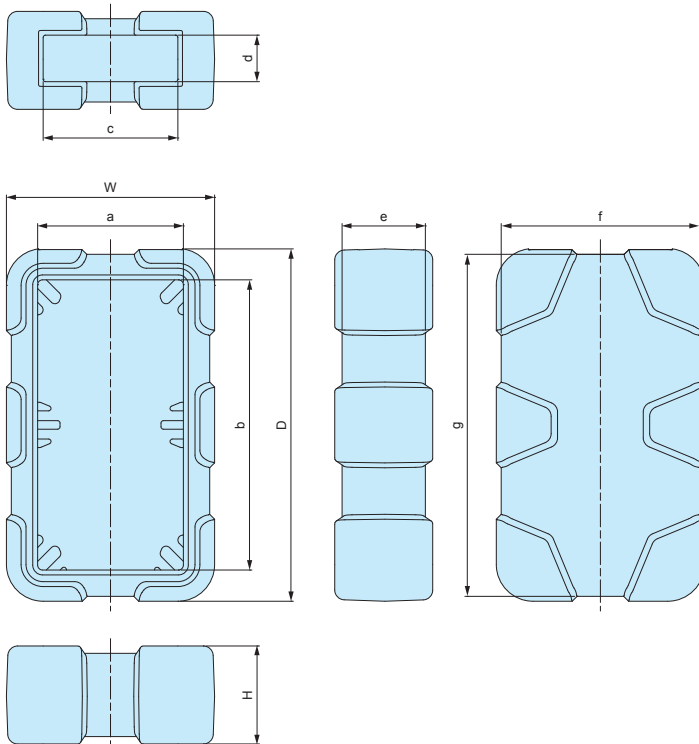

APPLICATION EXAMPLE

ULTRASONIC HARDNESS TESTER
Product by NOVOTEST (Ukraine)



Components

Part name	Material	Color
Silicone cover	Silicone	Orange • Green • Navy • Dark gray • Light gray

Product no. / Dimensions

Please suffix color code at the end of the product number.


Product no.	W	H	D	a	b	c	d	e	f	g	Suitable case	Weight (g)
LCTP115 -□	76	28	121.9	55.5	101.5	48.3	12	24	72	117.8	LC115	53.5
LCTP115H -□	76	36.5	121.9	55.5	101.5	48.3	20.5	32.5	72	117.8	LC115H	61
LCTP135 -□	85	40	143.9	59.5	118.5	55	19	34	81	139.7	LC135	115.5
LCTP135H -□	85	48	143.9	59.5	118.5	55	27	42	81	139.6	LC135H	124
LCTP145S -□	105	33	153.9	76.5	125.5	71	12	27	101	149.9	LC145S	129.1
LCTP145 -□	105	40	153.9	76.5	125.5	71	19	34	101	149.7	LC145	137.5
LCTP145H -□	105	48	153.9	76.5	125.5	71	27	42	101	149.7	LC145H	147
LCTP165 -□	89	40	173.9	63.5	148.5	59	19	34	85	169.7	LC165	143
LCTP165H -□	89	48	173.9	63.5	148.5	59	27	42	85	169.6	LC165H	151.5

TPS SERIES

TAPPING STANDOFF



- Tapping screw head allows for easy installation onto existing enclosure boss mount.
- 3 different sizes available : M2.3, M2.6 and M3 size.

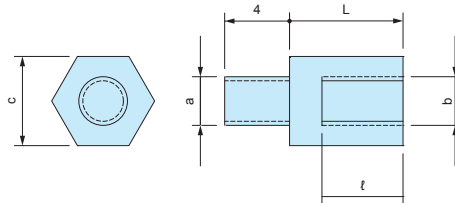

Product no. / Dimensions

■ Material / Finish : Brass / Unfinished

Product no.	Screw size (a)	Screw size (b)	c	L	ℓ	Pack of	Recommended enclosure models	
TPS-M2.3-4	M2.3	M2.3	5	4	3	4	WH series • PFE series LC • LCE • LCS • LCT series PF • PFF series (M2.3 boss models) TW • TWN • TWF series (M2.3 boss models) WP series (M2.3 boss models)	
TPS-M2.3-5	M2.3	M2.3	5	5	3	4		
TPS-M2.3-6	M2.3	M2.3	5	6	4	4		
TPS-M2.3-7	M2.3	M2.3	5	7	5	4		
TPS-M2.3-8	M2.3	M2.3	5	8	6	4		
TPS-M2.3-10	M2.3	M2.3	5	10	6	4		
TPS-M2.3-12	M2.3	M2.3	5	12	6	4		
TPS-M2.6-4	M2.6	M2.6	5	4	3	4		PF • PFF series (M2.6 boss models) WP series (M2.6 boss models)
TPS-M2.6-5	M2.6	M2.6	5	5	3	4		
TPS-M2.6-7	M2.6	M2.6	5	7	5	4		
TPS-M2.6-10	M2.6	M2.6	5	10	6	4		
TPS-M2.6-12	M2.6	M2.6	5	12	6	4	SU • OP series TWS • TW • TWN • TWF series (M3 boss models)	
TPS-M3-4	M3	M3	5.5	4	3	4		
TPS-M3-5	M3	M3	5.5	5	3	4		
TPS-M3-6	M3	M3	5.5	6	4	4		
TPS-M3-7	M3	M3	5.5	7	5	4		
TPS-M3-8	M3	M3	5.5	8	5	4		
TPS-M3-10	M3	M3	5.5	10	6	4		
TPS-M3-12	M3	M3	5.5	12	6	4		



- Please use a suitable sized socket driver to both secure and loosen the tapping standoff.



How to tighten

MT SERIES

PCB MOUNTING SCREWS for TPS




- PCB mounting Screws for TPS tapping standoffs.

Product no. / Dimensions

Product no.	M	L	Head style	Material	Finish	Pack of
NEW MT2.3-4	2.3	4	Pan	Steel	Trivalent chromate	20
NEW MT2.3-6	2.3	6		Steel	Trivalent chromate	20
NEW MT2.6-4	2.6	4		Steel	Trivalent chromate	20
MT3-4	3	4		Steel	Trivalent chromate	20

EM SERIES

PCB MOUNTING SCREW



- Self-tapping screws for mounting PCB on bosses or standoffs.
- EM-3-6 self-tapping screws are suitable for mounting 1.6mm or thicker PCB.

Product no. / Dimensions


Product no.	M	L	Material	Finish	Suitable enclosures	Pack of
EM-1.6	1.6	4	Steel	Trivalent chromate	WC • CSS • CS • PS (M1.6 size)	50
EM-2	2	5	Steel	Trivalent chromate	PS • TW • TWN • TWF • WP (M2 size)	50
EM-2.3	2.3	6	Steel	Trivalent chromate	WH • LC • LCT • LCS • LCE • PFE WSC (Top cover bosses) PF • PFF (M2.3 size) TW • TWN • TWF (M2.3 size) WP (M2.3 size)	50
NEW EM-2.3-8	2.3	8	Steel	Trivalent chromate	WSC (Bottom base bosses)	50
EM-2.6	2.6	6	Steel	Trivalent chromate	PF • PFF • WP (M2.6 size)	50
EM-3	3	5	Steel	Trivalent chromate	SU TWS • TW • TWN • TWF (M3 sizes)	50
EM-3-6	3	6	Steel	Trivalent chromate		50

MR SERIES


TORX SCREW



Countersunk head




Pan head



With pin



★ Without pin



★ : MR1.6-6S, MR-2S, MR2.6-10□, and MR3-14□ are without pin.


Product no. / Dimensions

★Mark = Without pin

Product no.	M	L	head no.	Head style	Material	Finish	Suitable enclosures	Pack of
MR1.6-6S★	1.6	6	T3	Pan	Steel	Nickel plated	CS • CSS	20
MR2.5-8PS	2.5	8	T8	Pan	Steel	Nickel plated	PF • PFE • PFF (M2.5 size)	20
MR2.6-10S★	2.6	10	T8	Countersunk	Steel	Nickel plated	TW • TWN (M2.6 models) TWF (M2.6 models)	20
MR2.6-10B★	2.6	10	T8	Countersunk	Steel	Black trivalent chromate	MX • MXA • MXB • MXF (M2.6 models)	20
MR2.6-12PS	2.6	12	T8	Pan	Steel	Nickel plated	LCT • LCS • LC115-F2 / F3 LCT • LCS • LC145S-F6	20
MR2.6-14PS	2.6	14	T8	Pan	Steel	Nickel plated	LCT • LCS • LC115H-F2 / F3 / M2 / 9V LCT • LCS • LC135-F4 / M2 / M3 / 9V LCT • LCS • LC135H-F4 / M2 / M3 / 9V LCT • LCS • LC145-F6 / M2 / M4 LCT • LCS • LC145H-F6 / M2 / M4 LCT • LCS • LC165-M4 LCT • LCS • LC165H-M4	20
MR2.6-14S	2.6	14	T8	Countersunk	Steel	Nickel plated	LCT • LCS • LC115-N / F2 / F3 LCT • LCS • LC145S-F6 / 145S-N LCE115-N TW • TWN7-2-11 / 7-4-11 / 7-5-11 TWF7-2-11 / 7-4-11 / 7-5-11 / 8-2-8 / 8-4-8	20
MR2.6-18S	2.6	18	T8	Countersunk	Steel	Nickel plated	LCT • LCS • LC115H-N / F2 / F3 / M2 / 9V LCT • LCS • LC135-N / F4 / M2 / M3 / 9V LCT • LCS • LC135H-N / F4 / M2 / M3 / 9V LCT • LCS • LC145-N / F6 / M2 / M4 LCT • LCS • LC145H-N / F6 / M2 / M4 LCT • LCS • LC165-N / M4 LCT • LCS • LC165H-N / M4 LCE115H-N • LCE135-N • LCE145H-N • LCE165H-N	20
MR3-8PS	3	8	T10	Pan	Steel	Nickel plated	PF • PFE • PFF (M3 size)	20
MR3-14S★	3	14	T10	Countersunk	Steel	Nickel plated	TW • TWN (M3 models)	20
MR3-14B★	3	14	T10	Countersunk	Steel	Black trivalent chromate	TWF (M3 models) MX • MXA • MXB • MXF (M3 models)	20
MR-1S	3	5	T10	Countersunk	Steel	Nickel plated	UC	20
MR-1B	3	5	T10	Countersunk	Steel	Black trivalent chromate	UC • UCY • US	20
MR-2S	3	10	T10	Countersunk	Steel	Nickel plated	HEN	20

STP SERIES

STRAP

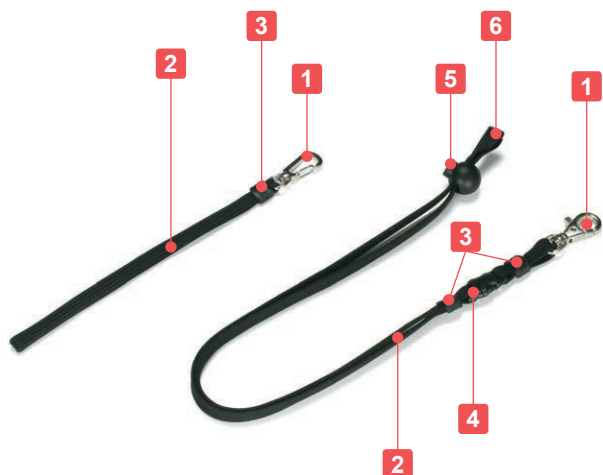


Wrist strap (STP-200)

Neck strap (STP-450)



- Strap with a metal hook
- Recommended to be used with CR key ring.

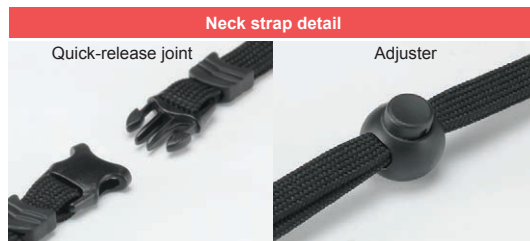

■ Only the neck strap has a joint and an adjuster.

Components

No.	Part name	Pcs	Material	Color / Finish
1	Metal hook	1	Diecast zinc & steel	Nickel plated
2	Strap	1	Nylon / Polyester	Black
3	Cap	1 / 2	Polyurethane / Elastomer	Black
4	Joint (Neck strap only)	1	Polyacetal	Black
5	Adjuster (Neck strap only)	1	Nylon	Black
6	Clamp (Neck strap only)	1	PE	Black

Product no. / Dimensions


Product no.	Strap width	Strap length	Strap material	Cap material
STP-200	8	200	Nylon	Polyurethane x 1
STP-450	10	450	Polyester	Elastomer x 2

CR-20

KEY RING



- Hole milling is required for case installation.

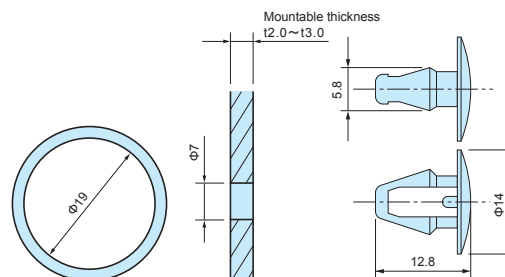

Components

Part name	Material	Color / Finish
Ring	SWRM 6 Steel	Nickel plated
Insert clip	Nylon	Black

Product no. / Dimensions

Product no.	Ring Φ	Installation hole	Mounting thickness
CR-20	φ19	φ7	t2.0 ~ t3.0