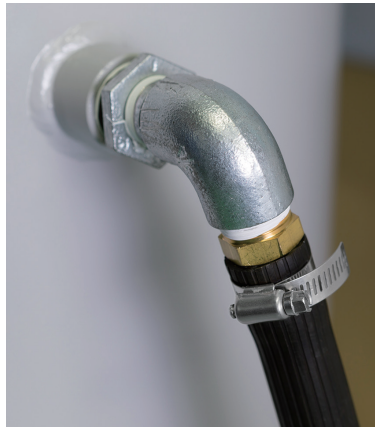
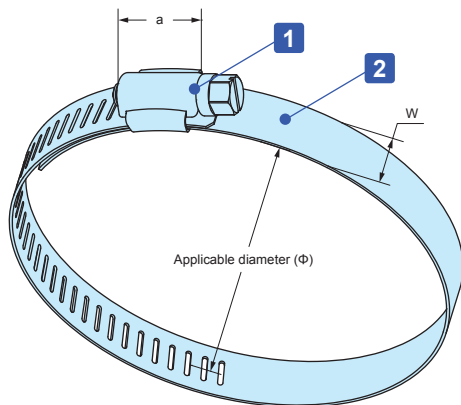



APPLICATION EXAMPLE

SNB dimensions


- Corrosion resistant stainless steel (SUS304) hose clamp.
- Usable for securing hoses for air, liquid and oil.
- It can be installed securely by tightening the screw.
- 6mm or 8 mm nut driver (box driver) is recommended for tightening. Minus screwdriver can also be used.

Components

No.	Part name	Pcs	Material	Finish
1	Bracket	1	Stainless steel SUS304	Polished
2	Strap	1	Stainless steel SUS304 t=0.6	Polished

Product no. / Dimensions

Product no.	Applicable diameter (Φ)	W	a	Recommended torque N · m	Nut driver #	Weight (g)	Pack of
SNB 8- 12	8 ~ 12	8.0	10.7	≧2	No.6	5.5	1
SNB 10- 16	10 ~ 16	8.0	10.7	≧2	No.6	5.7	1
SNB 13- 23	13 ~ 23	8.0	10.7	≧2	No.6	6.2	1
SNB 21- 38	21 ~ 38	12.7	19.0	≧7	No.8	20.5	1
SNB 33- 57	33 ~ 57	12.7	19.0	≧7	No.8	24.5	1
SNB 52- 76	52 ~ 76	12.7	19.0	≧7	No.8	27.5	1
SNB 72- 95	72 ~ 95	12.7	19.0	≧7	No.8	30	1
SNB 91-114	91 ~ 114	12.7	19.0	≧7	No.8	34.5	1
SNB105-127	105 ~ 127	12.7	19.0	≧7	No.8	37.5	1
SNB117-140	117 ~ 140	12.7	19.0	≧7	No.8	39.5	1
SNB130-153	130 ~ 153	12.7	19.0	≧7	No.8	41.5	1
SNB142-165	142 ~ 165	12.7	19.0	≧7	No.8	43.5	1
SNB155-178	155 ~ 178	12.7	19.0	≧7	No.8	46.5	1
SNB168-191	168 ~ 191	12.7	19.0	≧7	No.8	49	1
SNB181-204	181 ~ 204	12.7	19.0	≧7	No.8	51	1
SNB194-217	194 ~ 217	12.7	19.0	≧7	No.8	52.5	1
SNB207-230	207 ~ 230	12.7	19.0	≧7	No.8	57	1
SNB220-243	220 ~ 243	12.7	19.0	≧7	No.8	59.5	1
SNB233-256	233 ~ 256	12.7	19.0	≧7	No.8	62.5	1
SNB246-269	246 ~ 269	12.7	19.0	≧7	No.8	64	1
SNB259-282	259 ~ 282	12.7	19.0	≧7	No.8	67.5	1
SNB272-295	272 ~ 295	12.7	19.0	≧7	No.8	70	1
SNB285-308	285 ~ 308	12.7	19.0	≧7	No.8	71	1

■ Recommended torque listed is for reference only; actual may differ. Assemble after testing torque.